2 Hook Euro Cylinder Door Lock



Features

- Designed to meet the requirements of PAS 24 as part of a compliant door system, and
- Available as 35mm and 45mm Backsets with 16mm and 20mm face bars
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on all locks
- Central brass deadbolt throws 22mm to prevent unauthorised entry
- Bi-directional throw of locking features enhanced anti-jemmy feature
- Twin high security hooks for anti-seperation resistance 10mm (maximum) engagement into keeps
- Hooks deadlocked in the fully thrown position
- Accepts standard 92mm unsprung handles and euro profile cylinders (operates with all BS and DIN specification cylinders and most other types of cylinder)
- Split spindle for lever/pad applications choice of length available
- Patented adjustable steel keeps giving ±2.0mm for composite and timber doors (non-adjustable composite and timber keeps available)
- · Optional shootbolt engagement for additional security
- Single and french door (passive lock unit) applications





Shootbolt (optional)













2 Hook Euro Cylinder Door Lock

Ord	lerir	ng Det	tails					
					K	EY		
To select the required 2 hook						Backset		
MPL part number, use the tables						B Face Bar		
below to determine:						Datum Line		
The face bar and backset The overall length of the unit						Overall Length		
3. The position of the hooks						H Top Hook		
					В	H Bottom Hook		
OPTI	OPTION 1							
В	FB	DL	OL	TH	ВН	Part No.		
35	16	1050	2250	570	662	6935-00-85AA		
45	"	"	"	11	**	6945-00-85AA		
	OPTION 2							
В	FB	DL	OL	TH	ВН	Part No.		
35	16	1050	2250	730	750	6935-00-85LA		
45 35	20	1050	2250	730	 750	6945-00-85LA 6935-80-85LA		
45	"	"	"	"	"	6945-80-85LA		
ОРТІ	OPTION 3							
В	FB	DL	OL	TH	ВН	Part No.		
35	16	1050	2100	680	700	6935-00-85MA		
45	"	"	**	**	"	6945-00-85MA		
35 45	20	1050	2100	680	700	6935-80-85MA		
45						6945-80-85MA		
	OPTIONAL EXTRAS B Passive Unit Shootbolts							
В	ras	sive U	nit Sno	στροιτ				
35 45		•		•		ailable - assive Unit data sheet for more details		

rechnical information							
Corrosion resistance Meets the requirements of BS EN 1670:2007 Grade 4 (240 hours)							
Operation Endurance tested in excess of 50,000 cycles							
Performance Tested to meet the requirements of PAS 24 as part of a compliant door set							
Material Specification							
Steel BZP CR3 Passivate + Seal							
Steel BZP CR3 Passivate + Seal							
Steel BZP CR3 Passivate + Seal							
Steel BZP CR3 Passivate + Seal							

Packaging	
Locks: 5 locks per box	

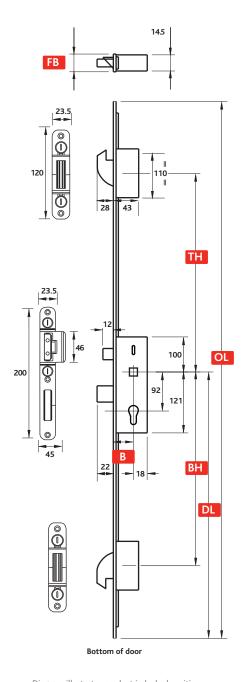


Diagram illustrates product in locked position.

All dimensions are in mm and are nominal.

ERA reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that
the finished product meets any required safety and performance specification.

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.