



Telephone: 02476 100750

Email: surveying@windowstradeplus.co.uk



Transom location from top frame to centre of transom. Does not include frame packers and joining strips.



Mullion location from edge of frame to centre of mullion. Does not include frame packers and joining strips.

Information Key


T = Toughened Glass X = Brick Work
L = Laminated Glass
XX = Knock On 20 | 35 | 50
D = Dummy Vent
J-S = Joining Strip
TV = Trickle Vent

Summary Guide

- Measure your window from the outside of the property
- Measure the brickwork opening in 3 places from both width and height
- Of the 3 measures, use the smallest and deduct approximately 10mm. That is your order size.
- Always measure in millimeters
- The height measurements must be from underneath any existing removeable cill (except stone cills or if you're ordering a window without cills).
- If your property is rendered, remove some render and measure to the brickwork edge.

Please note: We are unable to accept any responsibility for incorrect measurements. If you are unsure, we recommend that you consult a professional installer or builder.

Viewed Outside

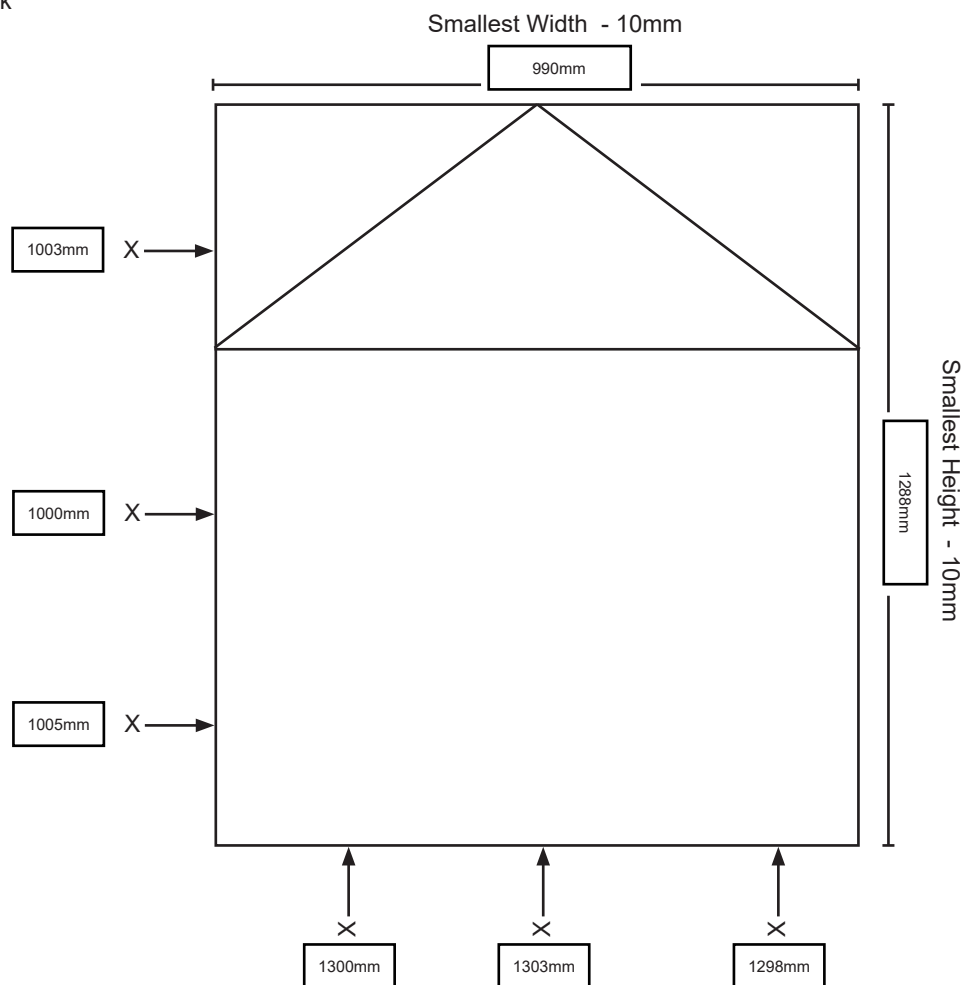

Please see information pages for a measuring guide

Customer Details

Reference:

Name:

Address

Telephone:

Email:

Frame Colour:

Cill: None | Stub | 150 | 180 | 225

Handle Colour:

Glazing Details

A / B / None Rated

Clear | Obscure (Type:)

Decoration